

Oskol Flat Base



Meeting and office chair available in 3 heights

Base: Four-star base in injected aluminum, painted or polished, or in polyamide.

Mechanism: Height-adjustable and tilting mechanism, with a locking option.

Wheels: Self-braking wheels when unloaded. Two options: hard or soft.

Seat: Base in beech plywood and injected polyurethane foam with a density of 60kg/m³ and a thickness of 45mm, **CAL 117** fire-retardant certified and free of carcinogenic chemicals.

Backrest with armrests: Available in three heights, made of injected polyurethane with a density of 60kg/m³ and variable thickness, **CAL 117** fire-retardant certified and free of carcinogenic chemicals.

Metal finishes: Epoxy/polyester powder coating with a thickness of 50-90 microns depending on the color, with adhesion compliant with **ISO 2409 Gt 0** and impact resistance according to **ASTM 2794 2.5 Joules D/R**.

Upholstery: See fabric specifications according to the manufacturer.

Environmental certificates


ISO 14006 Ecodesign.

ISO 9001

ISO 14001

Measures

Oskol Flat Base

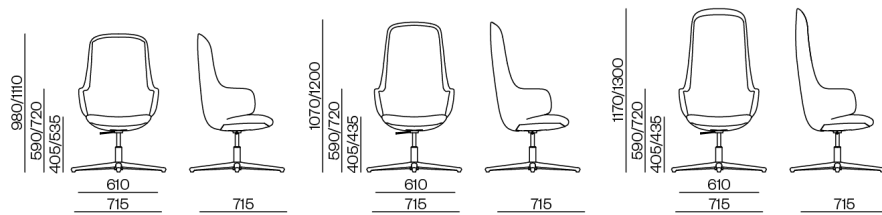

Specs

Product weight:

Low back: 13,2kg
Medium back: 13,6 kg
High back: 14,2 kg

Packaging information:

Low back: 380x560x840
Medium back: 380x560x950
High back: 380x560x1070

Number of chairs per box:

Low back: 1 unidad
Medium back: 1 unidad
High back: 1 unidad

Footage for upholstered versions (COM):

(para más uds. consultar fábrica)
Asiento 0,55ml/5 pies.

Respaldo bajo 1,30ml/14,5 pies. Total 1,85ml/19,5 pies.
Respaldo medio 1,45ml/15,5 pies. Total 2ml/20,5 pies.
Respaldo alto 1,60ml/16,5 pies. Total 2,15ml/21,5 pies.

AKABA

Atallu kalea 14
20170 Usurbil (Gipuzkoa)
Spain

akaba@akaba.net
T +34 943 372 211
F +34 943 371 052