

Oskol Office



Meeting and office chair available in 3 heights

Base: Five-star base in injected aluminum, painted or polished, or in polyamide.

Mechanism: Height-adjustable and tilting mechanism, with a locking option.

Wheels: Self-braking wheels when unloaded. Two options: hard or soft.

Seat: Base in beech plywood and injected polyurethane foam with a density of 60kg/m³ and a thickness of 45mm, **CAL 117** fire-retardant certified and free of carcinogenic chemicals.

Backrest with armrests: Available in three heights, made of injected polyurethane with a density of 60kg/m³ and variable thickness, **CAL 117** fire-retardant certified and free of carcinogenic chemicals.

Metal finishes: Epoxy/polyester powder coating with a thickness of 50-90 microns depending on the color, with adhesion compliant with **ISO 2409 Gt 0** and impact resistance according to **ASTM 2794 2.5 Joules D/R**.

Upholstery: See fabric specifications according to the manufacturer.

Environmental certificates

Designed following ISO 14006 Ecodesign criteria.


ISO 9001 Quality management

ISO 14001 Environmental management systems

EPD (Declaración medioambiental de producto, Environmental product declaration).

Measures

Oskol Office

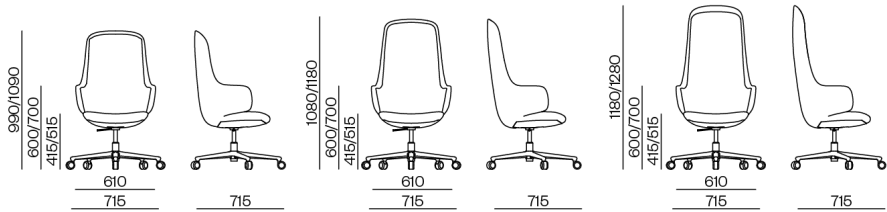

Specs

Product weight:

Low back: 13,3kg
Medium back: 13,7kg
High back: 14,3kg

Packaging information:

Low back: 380x560x840
Medium back: 380x560x950
High back: 380x560x1070

Number of chairs per box:

Low back: 1 unidad
Medium back: 1 unidad
High back: 1 unidad

Footage for upholstered versions (COM):

(para más uds. consultar fábrica)
Asiento 0,55ml/5 pies.

Respaldo bajo 1,30ml/14,5 pies. Total 1,85ml/19,5 pies.
Respaldo medio 1,45ml/15,5 pies. Total 2ml/20,5 pies.
Respaldo alto 1,60ml/16,5 pies. Total 2,15ml/21,5 pies.

AKABA

Atallu kalea 14
20170 Usurbil (Gipuzkoa)
Spain

akaba@akaba.net
T +34 943 372 211
F +34 943 371 052